

Assembly Instruction Sheet #IS-1227P34 For Style 1227P34

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.


Light Source: (1) E26 Base Bulb (Qty Maximum (Not Included), Individual Assembly Time: 16-30 minutes)

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams before to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

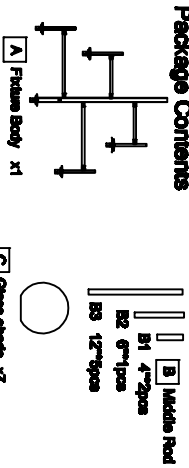


PART	DESCRIPTION	QUANTITY
AA	Cap nut	2pcs
BB	Wire nut	2pcs
CC	Outlet box screw	2pcs
DD	Mounting screw	2pcs
EE	Mounting bracket	1pc
FF	Hex Nut	1pc
GG	Lock Washer	1pc
HH	Supply wire	1pc
II	Ground wire	1pc
JJ	Outlet box screw	2pcs
KK	Mounting screw	2pcs
LL	Mounting bracket	1pc


STEP 1 - Install Rods to Fixture Body
A. Thread the power cord to the Middle Rods, for the Middle Rods with the Fixture Body than the same to connect the other pieces of Rods, finally fix the Canopy with the Rods.




STEP 2 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket.

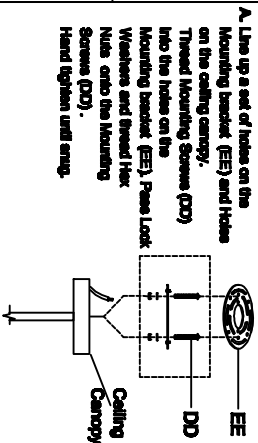


STEP 3 - Attach Mounting bracket to Outlet Box
A. Pass the supply wire through the Mounting bracket (EE), Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws. Tighten until snug.




STEP 4 - Fit Ceiling Canopy to Mounting bracket Assembly
A. Fit the ceiling canopy to Mounting Screws (DD) and secure with Cap nut (AA). Note: The ceiling canopy should be snug against the ceiling and the Cap nut (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer, and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Cap nut (AA) and ceiling canopy, and proceed to Step 5.



STEP 5 - Wire Connections
A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

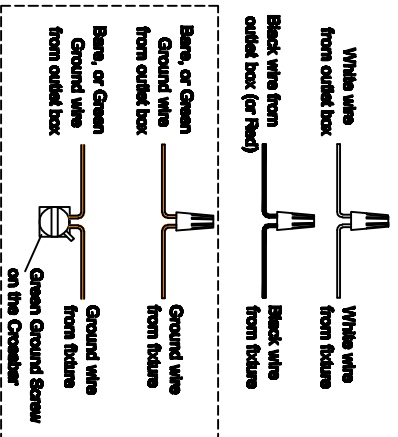

STEP 6 - Install Ceiling Canopy to Ceiling
A. Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (A) over the outlet box. Align the holes in the ceiling canopy with the Mounting Screws (DD). Secure with Cap nut (AA) and hand tighten until snug.

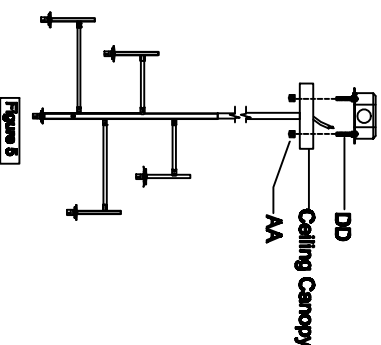

STEP 7 - Install bulb and Glass shade
A. Install bulbs into sockets and screw snug into place.
B. Put the Glass shade to the Fixture's Body

