EIVING


Collection: Bethany Installation manual for:

LD7021W6BK/BR/SN W6.7" E8.5" H12.5" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert the mounting bracket screw(P2) into the mounting bracket (P1)
- 6.Use the screw(P11) to lock the lamp body to the mounting bracket (P1) on the ceiling.
- 7.Locking the fabric shade(P3) with the socket ring(P12)
- 8.Install E12 light source.(Bulbs not supplied)

The end!

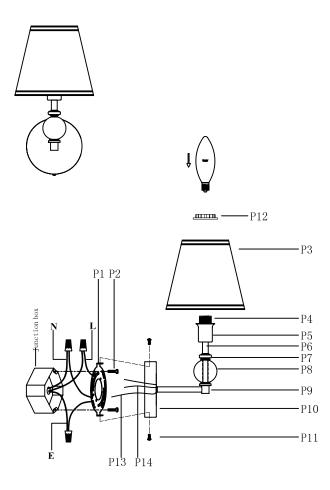

| Part | Picture | Description | Qty | Check list |
|------|-----------|--------------------------------------|-----|------------|
| P1 | | mounting bracket Φ4.53″*H0.59″ | 1 | |
| P2 | | Mounting bracket screw | 2 | |
| Р3 | | Fabric shade (Φ6.7"+Φ3.9")*H5.9" | 1 | |
| P4 | Ī | E12 holder | 1 | |
| Р5 | | Anti-edge light cup Φ1.57"*H1.57" | 1 | |
| Р6 | | Tube (Ø 0. 49"*H0. 98") | 1 | |
| Р7 | 0 | Metal parts (Φ1.23"*H0.47") | 1 | |
| Р8 | | Crystal Ball (Φ1.97″) | 1 | |
| Р9 | | Lamp Arm L5.06"*W0.98"*H0.85" | 1 | |
| P10 | | BackPlated (Φ4.72"*H0.98") | 1 | |
| P11 | | Screw | 2 | |
| P12 | | E12 Socket Ring | 1 | |
| P13 | | UL18#Ground Wire, L9.84" | 1 | |
| P14 | \approx | UL18#, L6″ | 1 | |

[&]quot;L" = Hot wire

[&]quot;N" = Neutral wire

[&]quot;E" = Ground wire