

LIVING DISTRICT


Collection: Taylor

Installation manual for:

LD7039D36BK/BR/BRB/PN D36" H28.3" L8

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Insert the mounting bracket screw(P2) into the mounting bracket (P1)
 6. Twist rod(P13) to wire box(P14), Assemble other 3 rods, connect Universal head(P18) with the rod(P5)
 7. Separate and adjust the lamp arms, use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
 8. Install E12 light source.(Bulbs not supplied)
 9. Twist the glass ball(P7) onto the cup(P11)
- The end!

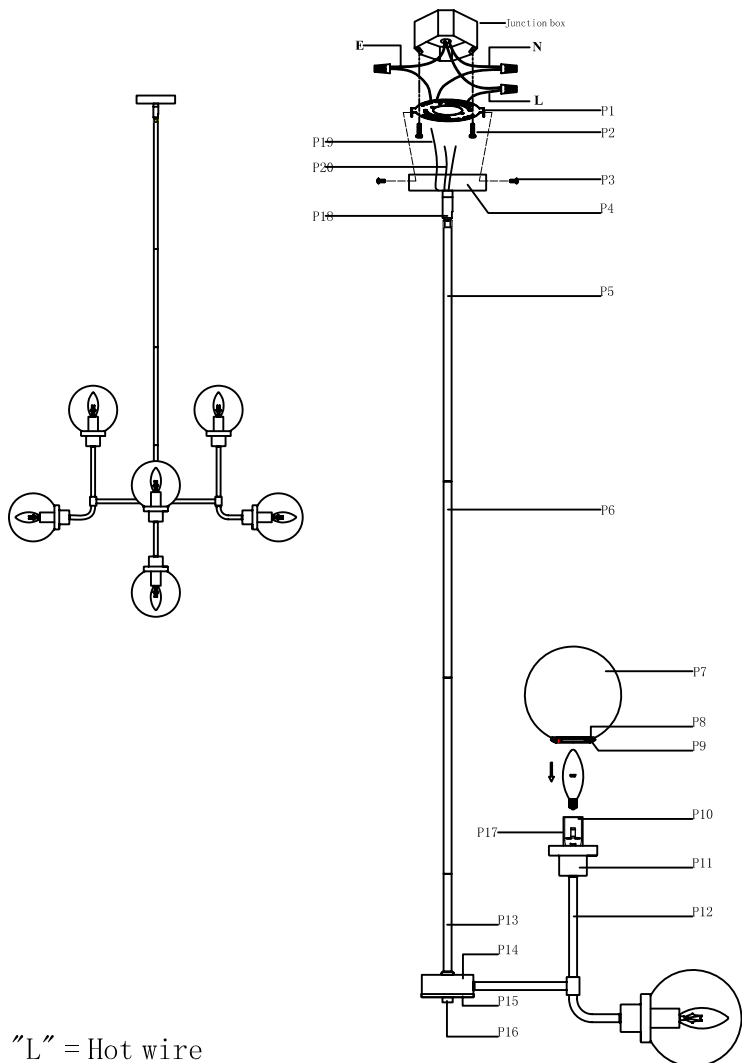

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

Part	Picture	Description	Qty	Check list
P1		mounting bracket Φ4.53"*H0.59"	1	
P2		Mounting bracket screw	2	
P3		Screw	2	
P4		Canopy Φ4.72"*H0.98"	1	
P5		Rod L15.7"*Φ0.49" (ROD3013)	1	
P6		Rod L11.8"*Φ0.49" (ROD3013)	2	
P7		Glass shade Φ5.9"*H5.7"	8	
P8		Plate Φ1.8"*T0.1"	8	
P9		Aluminum ring Φ2.7"*H0.3"	8	
P10		E12 holder	8	
P11		Double layer cup Φ3"*H1.8"	8	
P12		Lamp arm L9.8"*H9.4"	4	
P13		Rod L5.9"*Φ0.49" (ROD3013)	1	
P14		Wire Box Φ3.1"*H1.4"	1	
P15		Box Cover Φ3.2"*H0.2"	1	
P16		Nut Φ0.6"*H0.3"	1	
P17		Tube Φ1.2"*H2.0"	8	
P18		Universal head Φ0.59"*H2.24"	1	
P19		UL18#Ground wire, L9.84"	1	
P20		UL18#, L6"	1	