


CF3201

16" LED TWO RING DECORATIVE CEILING LIGHT



Performance


- metal base with white powder coated; nickel stain ring, white acrylic diffuse lens
- ETL listed, for use in Damp locations
- 120V dimmable

Construction

- metal base with white powder coat finish, nickel stain ring
- White acrylic diffuse lens
- 1xQT1640/720/R LED module

Installation

- The LED ceiling light is surface mounted by standard mounting screw (mounting screws not provided)

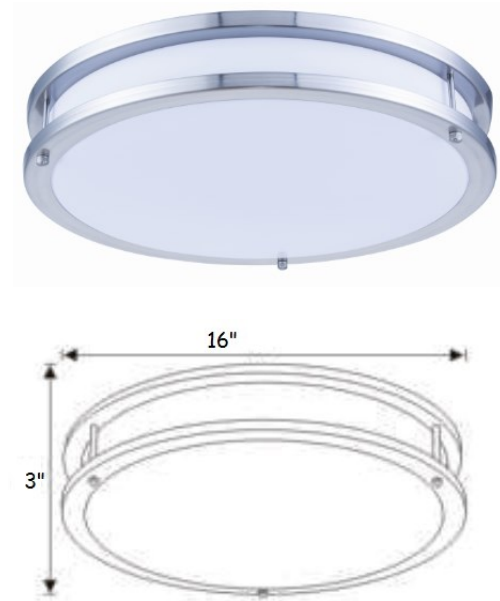

LED Ceiling Light

CF3201

Photometric

CF3201

Luminous flux	1800LM
Maximum intensity	cd
Input wattage	26W
Lumens per watt	70 LPW



Specifications

Model #	CF3201
Input Voltage	120V AC, 60Hz
Color Temperature	3000K
CRI	90+
Current	110mA
Watts	26W
Lumens	1800LM
Dimmable	YES
Housing Material	metal
Lens	White acrylic diffuser
Rating	ETL&cETL Listed, Damp locations
Dimensions	Dia 16"x H 3"
Power Factor	>95%
Mounting	Surface mount
LED Type	LM80 LEDs
Average Life (Hrs)	50,000 hrs.
Warranty	5-year limited