Collection:Baxter
Installation manual for:

LD2224C D11.8″H11.8″L1

# Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws(P2) in side of top unit the mounting bracket.
6. Fix the Mounting bracket(P1) to the Canopy and tighten by the screws(P4).
7. Fit lampshade(P12) with lampholder ring(P14).
8. Install the bulbs into the lamp fixture.(Bulb not included).

The end!

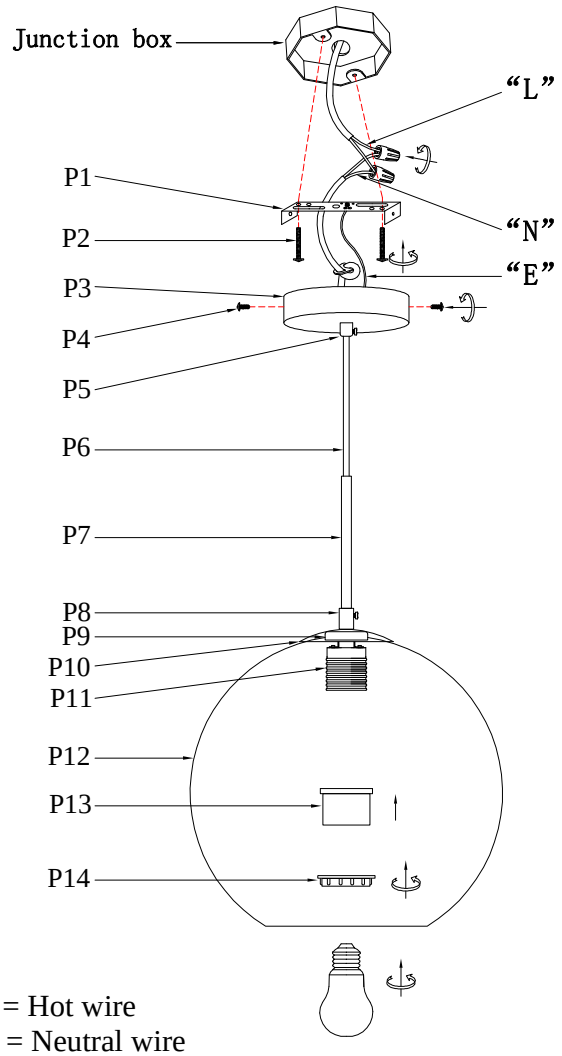


"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

## PARTS LIST

| part | picture | Description | Qty | Check list |
|---|---|---|---|---|
| P1 | | L4.5″ Mounting bracket | 1 | |
| P2 | | 5/32-32 Screw | 2 | |
| P3 | | ø4.7″ Metal Canopy | 1 | |
| P4 | | M4 Screw | 2 | |
| P5 | | Wire lock | 1 | |
| P6 | | Power Cord 60″ 18# Black | 1 | |
| P7 | | L5.1″ Metal Tube | 1 | |
| P8 | | Wire lock | 1 | |
| P9 | | ø1.6″ Metal Cover | 1 | |
| P10 | | ø3.5″ Metal Cover | 1 | |
| P11 | | E26 Lampholder | 1 | |
| P12 | | ø11.8″Lampshade | 1 | |
| P13 | | ø2″ Metal Tube | 1 | |
| P14 | | E26 Lampholder Ring | 1 | |