












PARTS & ASSEMBLY SHEET

Fixture Name: Waverly 3500- 5/8 AB

This fixture assembled PO: _____ Date: _____


Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Canopy 1ea D6"xH1" 	Wire Connectors 3ea P3 Orange 	Top Loop 1ea W50 x 60mm 	
Chain 1ea 6ft x3.8mm 	Junction Box Screw 2ea 8/32" x 1" 	Spring Washer 1ea @15 x 2mm 	
Chain Connector 2ea @4.2X50mm 	Canopy Loop with Collar 1ea @3/8 x 40mm x 5mm 	Nipple 1ea @3/8 x 40mm 	
Mounting Strap w/ ground screw 1ea 3/4"x4" 	Hex Nut 2ea @3/8 x 3mm 		
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)		
Comments _____			

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. Thread the threaded Stem (P) into the coupling at center of fixture Body (R).
2. Thread the Top Loop (J) onto Stem (P). Hand-tighten until snug.

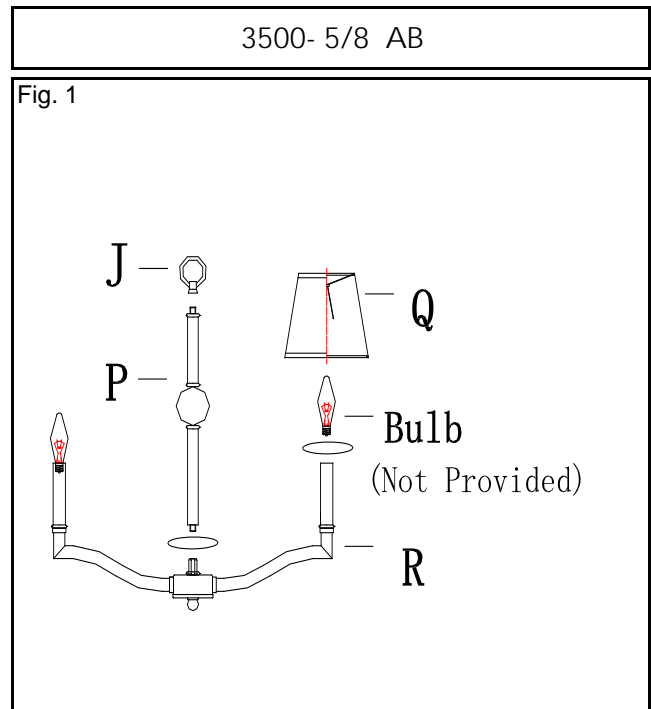

For Customer Service, contact the place of purchase to arrange for replacement parts.

PARTS & ASSEMBLY SHEET (cont.)

Fixture Name: 3500- 5/8 AB

ASSEMBLING THE FIXTURE (Fig. 2)

3. Measure to determine the correct number of links needed for proper hanging height. Use a pair of pliers to open one link of Chain (K) then remove the excess chain and discard it.

4. Use Chain Connector (L) to attach one end of the chain to the Top loop (J). Then, close the chain connector.

5. Feed the fixture wires through every three links of chain and pull the wires until taut.

6. Slip Canopy Loop Collar (H) over the chain, then do the same with the Canopy (G).

7. To complete the installation, use the other chain connector and attach the other end of the chain to Canopy Loop (F) and close the chain connector.

8. Make sure the weight of the chandelier will be supported by the chain, not the electrical wire.

* You may now install the fixture.


Note: Complete these remaining steps after the fixture is hung.

9. Install the light bulbs (not provided) in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING)

10. Carefully press the clips inside of Shade (Q) onto the bulb.

Fig. 2

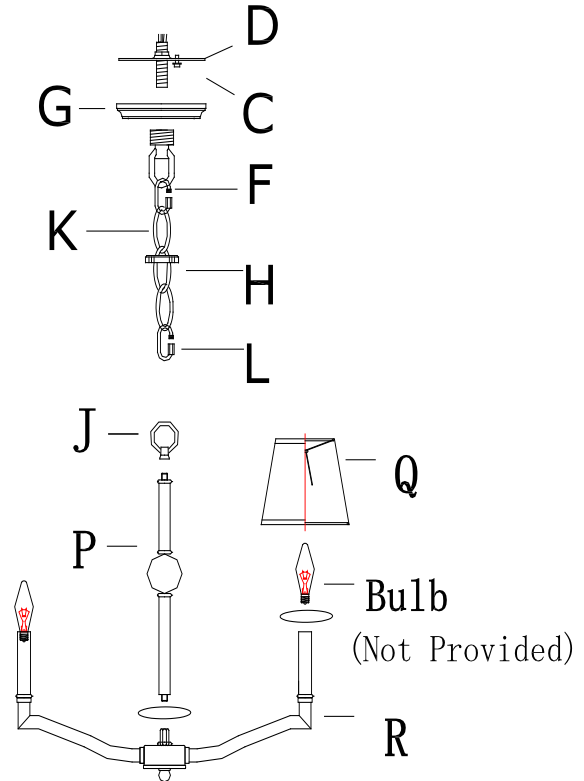

For Customer Service, contact the place of purchase to arrange for replacement parts.



INSTALLATION INSTRUCTIONS

Fixture Name: Waverly 3500- 5/8 AB

For Chandelier Light Fixture

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

- Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and the Parts and Assembly Sheet.
- Shut off the power at the circuit breaker and completely remove the old fixture from ceiling, including the old mounting strap.
- Thread Nipple (C) into Canopy Loop (F) until snug.
- Thread the other end of the Nipple (C) with the canopy loop attached into Mounting Strap (D).
- Place Lock Washer (B) over end of Nipple (C) which should protrude through Mounting Strap (D). Then thread Hex Nuts (A) onto Nipple (C) until tight.
- Take this mounting strap assembly and mount to ceiling junction box with junction box Screws (E). Tighten the screws securely with a screw driver.
- Unscrew the Canopy Loop Collar (H) from the canopy loop. Take the canopy and pass over the canopy loop. Approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. *The Canopy loop collar should fit snugly on the canopy loop after the canopy is installed. Remove Canopy and Canopy lock collar.
- Assemble the fixture and have an assistant or a secure support to hold the weight of the fixture while you complete the wiring connections.
- Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.

CONNECTING THE WIRES (Fig. 2)

- Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED) .
- Ground wire connection: Connect the fixture ground wire to house ground wire, which usually has green or copper insulation, with the correct size of wire connector. If there is no house ground wire at ceiling junction box then attach fixture ground wire securely onto green grounding screw located on the mounting bar.

NOTE: Twist the wires together in the same direction that you twisted the wire connector onto the wires.

- Tuck the wire connections neatly into the Junction Box.

- Raise Canopy (G) to the ceiling and secure in place by tightening the Canopy loop collar (H) into the Canopy Loop (F)
- Install the light bulbs and glass shade as per the fixture assembly sheet.

Fig. 1


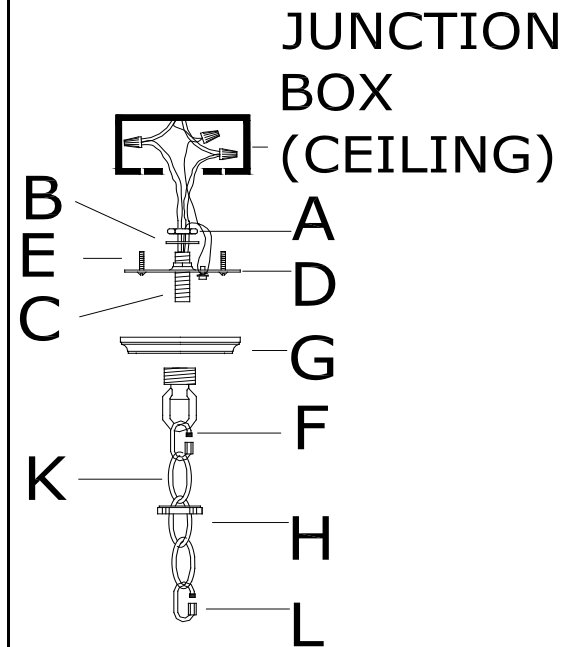


Fig. 2

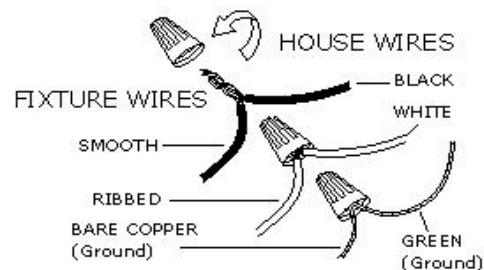

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

For Customer Service, contact the place of purchase to arrange for replacement parts.