

### Features

- Two lever handles allow for both volume and temperature control
- 12.0 gpm (45.4 l/min) @ 45 psi
- 6-1/2" (165mm) spout reach
- Non-diverter bath spout.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Loure faucets, accessories, and showering components to complete your bathroom.

### Material

- Premium Metal construction
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Deck or bath-mount



### Codes/Standards

ASME A112.18.1/CSA B125.1

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
SN	Vibrant® Polished Nickel
BN	Vibrant® Brushed Nickel

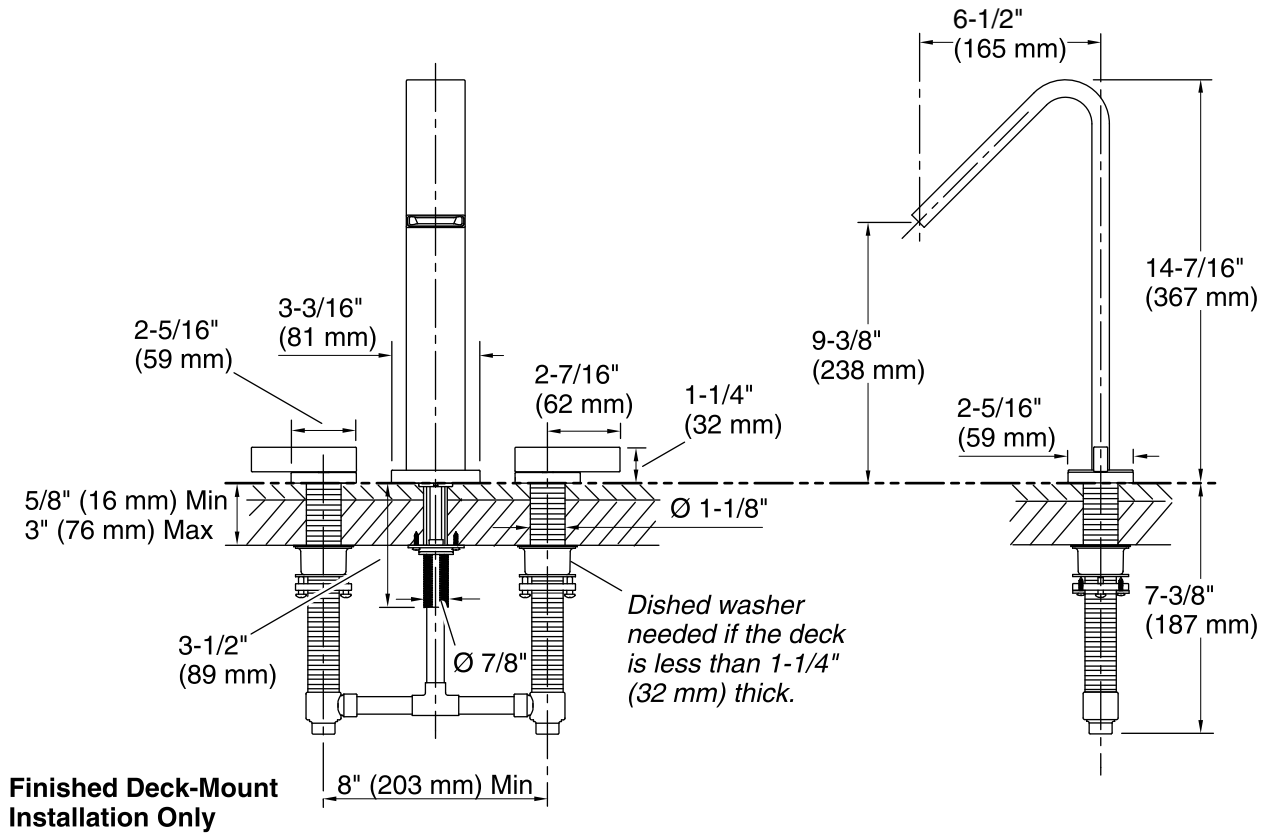

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 12 gal/min (45.4 l/min)

#### Spout:

Spout reach: 6-1/2" (165 mm)

### Notes

Install this product according to the installation guide.

For a finished bath deck/rim less than 5/8" (16 mm) thick: Install wood reinforcing material to the underside of the deck/rim. The combined thickness of the reinforcing material and the deck/rim must not exceed 3" (76 mm).