

### Features

- Replaces K-201 and K-202 filters
- Single-stage filtration and absorption system.
- Filter reduces particulates, sediment/rust, turbidity, cysts, chlorine taste/odor, and lead.
- Cartridge filter can be twisted in and out for easy replacement.
- Replace filter media every 1389 Gallons (5258 L) or six months
- 1.39 gallons per minute (5.26 liters per minute) maximum flow rate at 60 PSI
- For use in Models K-200, K-6665-F, and K-6666-F
- Meets NSF International standards.




### Codes/Standards

CSA B483.1  
NSF/ANSI 42  
NSF/ANSI 53  
All applicable US Federal and State material regulations

### KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

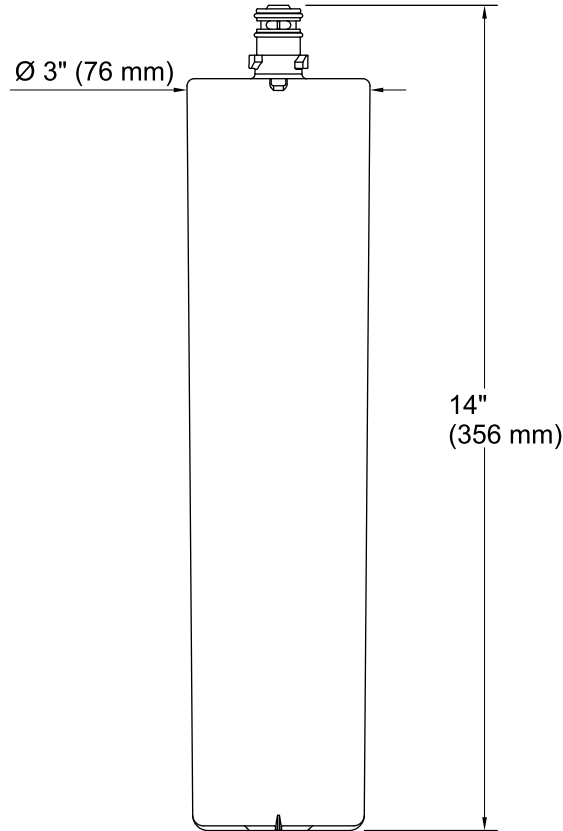

**Technical Information**

All product dimensions are nominal.

**Notes**

Install this product according to the installation instructions.

For cold water use only.

Application guideline/water supply parameters:  
Water Pressure: 40-120 psi (276-827 kPa) Water  
Temperature: 33-100°F (0.5-37.8°C) Capacity:  
1389 gal (5258 L)