

HydroRail[®]-S

1.75 gpm shower column kit with Awaken® K-76471-G

Features

- Includes K-72419-G Awaken® showerhead, K-72415-G Awaken® handshower, K-45906 HvdroRail®-S shower column and K-45982 Awaken® 60" ribbon hose
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Simple thumb tab smoothly transitions between sprays
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup
- 1.75 gpm (6.6 lpm) maximum showerhead/handshower flow rate at 45 psi (3.1 bar)
- Slidebar bracket allows you to adjust height and angle of handshower
- Diverter at base of column makes for easy toggling between handshower and showerhead

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation

- Wall-mount
- For use in shower-only installations
- Installs in less than 60 minutes without changes to in-wall plumbing (subject to condition of existing installation)
- Includes an adapter that will fit with most installations but may Color tiles intended for reference only. require K-1194630, K-1187917 or K-1194302

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components: 45906

10000
45982
72415
72419





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes

Color Code Description




- CP **Polished Chrome**
- Vibrant® Brushed Nickel BN
- BL Matte Black




KOHLER. Faucets

HydroRail®-S

1.75 gpm shower column kit with Awaken® K-76471-G

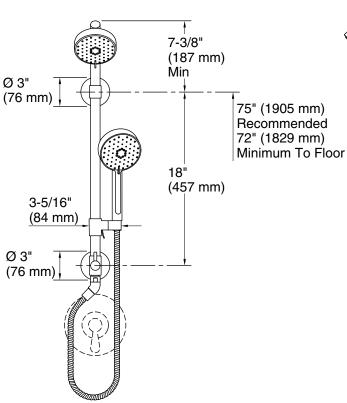

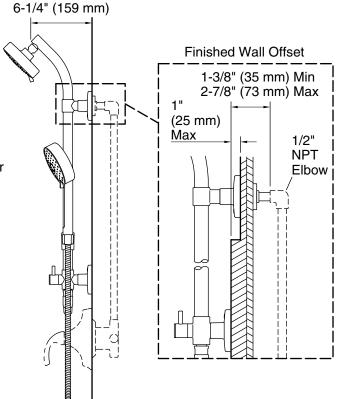

Technical Information

All product dimensions are nominal. Drain included: No

Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min) flow:

Notes

Install this product according to the installation instructions.

IMPORTANT! The slidebar must be mounted to stud framing at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the slidebar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

