KOHLER, Faucets

Kallan®

Widespread bathroom sink faucet K-R24056-4DL

Features

- Two-handle widespread faucet for 8" 16" (203 406 mm)
- Two lever handles offer separate control of hot and cold water
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.2 gpm (4.5 lpm) maximum flow rate
- Coordinates with other products in the Kallan™ collection
- Box includes: Assembled faucet, handles, supply lines, clicker drain, mounting hardware, installation instructions

Material

- Premium material construction for durability and reliability
- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
- Spot Repel™ finish resists fingerprints, smudges, and water spots (Oil-Rubbed Bronze finish only)

Installation

- Widespread
- Simplified faucet installation; mounting hardware requires no special tools
- Handles preassembled on valves and quick-connect fittings simplify installation

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner

Included Components

Additional Components: Supply Lines (Qty 2)





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


BN Vibrant® Brushed Nickel





Kallan®

Widespread bathroom sink faucet K-R24056-4DL

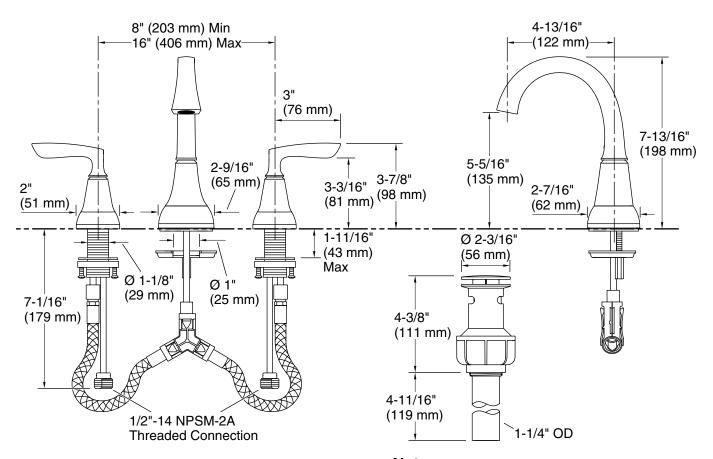

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 4-13/16" (122 mm)

Notes

ADA complaint for faucet handles only.

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

