

# **Bancroft®**

# Rite-Temp® Shower Valve Trim K-TLS10583-4

#### **Features**

- Includes face plate with handle, shower arm and flange.
- Single handle controls both on/off activation and temperature settings.
- Supplied with ADA compliant metal lever handle.
- For use with any KOHLER showerhead (sold separately).
- Complements the Bancroft® faucet and accessory collections.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

Trim set requires valve to complete installation (sold separately).

## **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

## **Optional Products/Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies





## Codes/Standards

ASME A112.18.1/CSA B125.1

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.


| Color | Code | Description              |
|-------|------|--------------------------|
|       | CP   | Polished Chrome          |
|       | SN   | Vibrant® Polished Nickel |
|       | BN   | Vibrant® Brushed Nickel  |
|       | BV   | Vibrant® Brushed Bronze  |
|       | 2BZ  | Oil-Rubbed Bronze        |





# **Bancroft®**

# Rite-Temp® Shower Valve Trim K-TLS10583-4

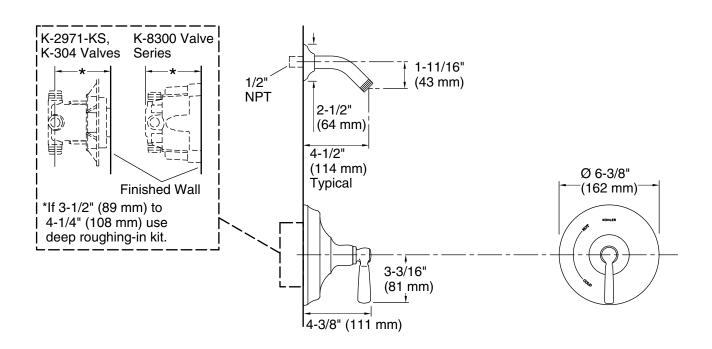

## **Technical Information**

All product dimensions are nominal.

#### **Notes**

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

