

Clean, modern design and outstanding light performance distinguish Taag high output LED wall packs. Designed for outdoor security and general illumination, Taag 6 is ideal in commercial and residential applications for which well-defined illumination is required.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

## SPECIFICATIONS

DELIVERED LUMENS	625.2
WATTS	10.2
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	2.5 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



TAAG 6  
shown in bronze




TAAG 6  
shown in charcoal

## ORDERING INFORMATION

700OWTAG	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	<b>830</b> 80 CRI, 3000K <b>840</b> 80 CRI, 4000K	<b>6</b> 6"	<b>D</b> DIFFUSE	<b>Z</b> BRONZE <b>H</b> CHARCOAL	<b>UNV</b> 120V-277V	<b>S</b> SYMMETRIC	NONE <b>PC</b> BUTTON PHOTOCONTROL <b>LF</b> IN-LINE FUSE <b>SP</b> SURGE PROTECTION <b>PCLF</b> BUTTON PHOTOCONTROL & IN-LINE FUSE <b>PCSP</b> BUTTON PHOTOCONTROL & SURGE PROTECTION <b>LFSP</b> IN-LINE FUSE & SURGE PROTECTION <b>PCLFSP</b> BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION

# TAAG 6 WALL

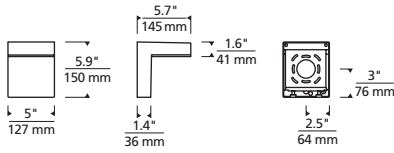


Taag 6

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### TAAG 6

Total Lumen Output: 625.2  
 Total Power: 10.2  
 Luminaire Efficacy: 61  
 Color Temp: 4000K  
 CRI: 80+  
 BUG Rating: B1-U1-G0

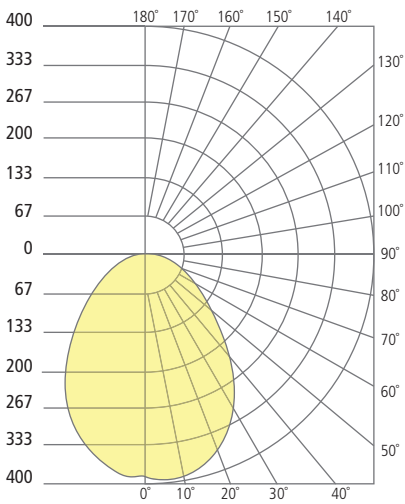

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



GENERATION BRANDS

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.