


Collection: Cashel Installation manual for:

LD2280 D5. 9"H6. 6"L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws(P2) in side of top unit the mounting bracket.
- 6. Fix the Mounting bracket (P1) to the Canopy and tighten by the screws (P4).
- 7.Fit lampshade(P9) with lampholder ring(P10).
- 8.Install the bulbs into the lamp fixture.(Bulb not included).

The end!

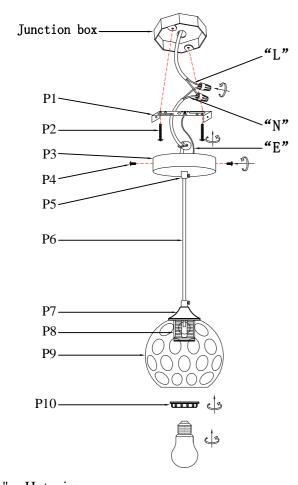

L^{*} = Hot wire
"N" = Neutral wire
"E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check	list
P1		L4.5" Mounting bracket	1		
P2	(managana)	5/32-32 Screw	2		
Р3		Ø4.7″ Metal Canopy	1		
P4	()	M4 Screw	2		
P5	G	Wire lock	2		
P6	~	Power Cord 60" 18# Black	1		
P7		ø2.4″ Metal Cover	1		
P8		E26 Lampholder	1		
P9	6000	ø5.9"Lampshade	1		
P10		Lampholder ring	1		