

Collection: Maddox


Installation manual for:

LD6008D9 L9.75"W9.75"H14.5" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6.Put the canopy(P3) on the nipple(P4) and connect the canopy lock(P7), then use the canopy ring(P6) to screw tighten.
- 7. Hang the lamp body to the chain(P8) and connect the canopy lock(P7).
- 8.Install E26 light source.

The end!

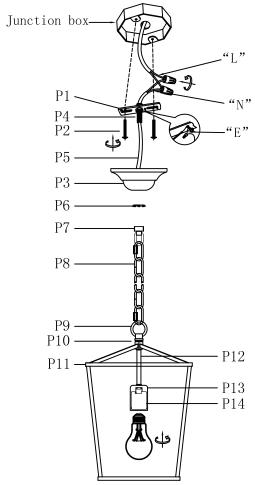

PARTS LIST

part	picture	Description	Qty	Check lis
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
Р3		D5.1" Canopy cover	1	
P4		Nipple	1	
P5	~	Power Cord 7.7', 18AWG, SPT-1 Clear/Gold/Black	1	
P6	-	Canopy ring	1	
P7	₽	Canopy lock	1	
P8		L5'CHAIN04P Plain Design	1	
Р9	Q	D1.5" Loop	1	
P10	Û	W9.7"*H12.64" Main lamp holder	1	
P11		Washer	1	
P12		L5.15" Both end threaded pipe	1	
P13		Socket cover	1	
P14	E	E26 Socket	1	

L'' = Hot wire

"N" = Neutral wire

 $^{\prime\prime}E^{\prime\prime}$ = Ground wire